



Township of Livingston  
Engineering Department

357 S. Livingston Avenue  
Livingston, NJ 07039  
Phone: 973-535-7950  
Fax: 973-535-7989

## Permit Application

### Application for Sidewalk Permit – Residential Properties

Date \_\_\_\_\_

Block: \_\_\_\_\_ Lot: \_\_\_\_\_ Worksite Address: \_\_\_\_\_

REQUIRED FOR SUBMISSION: \$40.00 Application Fee & current survey / scaled plot plan indicating all sidewalk areas scheduled to be repaired and/or replaced, drawn to scale.

Owner in Fee: \_\_\_\_\_ Telephone: \_\_\_\_\_

Owner Address: \_\_\_\_\_ Email: \_\_\_\_\_

Contractor: \_\_\_\_\_ Telephone: \_\_\_\_\_

Contractor Address: \_\_\_\_\_ Email: \_\_\_\_\_

Dimensions of sidewalk to be repaired / replaced: \_\_\_\_\_ Feet (Length)

Driveway Apron to be repaired / replaced: \_\_\_\_\_ Feet (Length)

Does this application include a curb cut?\*  YES  NO

\*IF YES – Applicant must also submit an Application for Road Opening Permit

1. The undersigned agrees to abide by all provisions of Chapter 274, Streets and Sidewalks of the Code of the Township of Livingston including §274-14 Maintenance and Repair.
2. The undersigned agrees that any sidewalk abutting their property not included in this Sidewalk Permit Application, but in poor condition, will also be repaired/replaced.
3. The Engineering Department shall be notified 24 hours in advance for inspection of forms. No concrete is to be poured without proper inspections.
4. All work is to be completed in accordance with the attached construction detail, during suitable weather conditions.


I, the undersigned, hereby acknowledge that I have read this permit application, and agree to perform all work in full compliance with the ordinances of the Township of Livingston and the laws of the State of New Jersey in relation thereto.

OWNER/APPLICANT SIGNATURE: \_\_\_\_\_ DATE: \_\_\_\_\_

DATE PAID: \_\_\_\_\_ Check #: \_\_\_\_\_ Cash: \_\_\_\_\_

APPROVAL, TOWNSHIP ENGINEER: \_\_\_\_\_ DATE: \_\_\_\_\_

INSPECTED BY: \_\_\_\_\_ DATE: \_\_\_\_\_

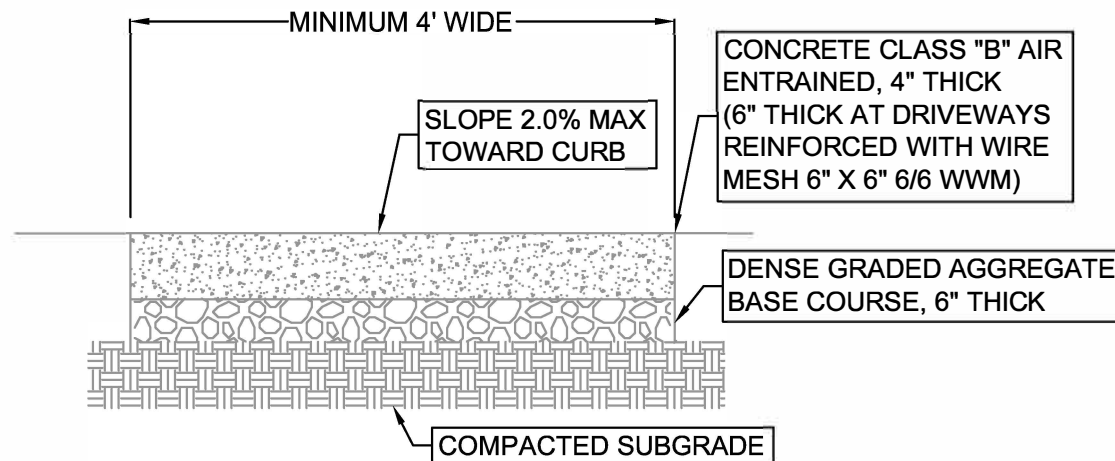

**NOTES**

1. SUBBASE SHALL BE COMPACTED TO THE SATISFACTION OF THE ENGINEER.
2. LONGITUDINAL JOINTS, 1/4" WIDE, SHALL BE PROVIDED BETWEEN CURBS AND ABUTTING SIDEWALKS AND SHALL BE FILLED WITH A PREMOLDED BITUMINOUS TYPE JOINT FILLER.
3. EXPANSION JOINTS OF 1/2" WIDE BITUMINOUS CELLULAR TYPE JOINT FILLER WILL BE PROVIDED EVERY 12'.
4. TRANSVERSE SURFACE GROOVES SHALL BE CUT IN SIDEWALKS BETWEEN EXPANSION JOINTS AT INTERVALS EQUAL TO THE SIDEWALK WIDTH.
5. ALL JOINTS AND EDGES ARE TO BE TOOLED.
6. SURFACE SHALL BE BRUSHED TRANSVERSELY TO A NEAT FINISH.
7. STANDARD CONCRETE SIDEWALK MEETS NJDOT STANDARDS.

**CONCRETE SIDEWALK**  
**N.T.S.**